

# TYR TACTICAL® BELTS



## TYR TACTICAL® LOAD CARRIAGE GUNFIGHTER® BELT

### FEATURES & SPECIFICATIONS:

- Dim: 6.5" W

#### CONSTRUCTION

- Engineered utilizing patented PV® material
- PALS webbing for MOLLE attachment
- Patented Ballistic Vein®
- Antimicrobial/FR treated padded spacer mesh


#### RECOMMENDED INNER BELTS

- Base Belt-D\*
- Complete line of Rigger Belts\*

\* Sold Separately



TYR-DBB001



TYR-RBB017

### SIZES:

Small - 2XLarge

Foam Insert

**TYR-BKBLB-F**

Exceeds Level II & USSOCOM Frag Spec

**TYR-BKBLB-NFA2/DK**

Meets NIJ 0101.06 Level IIIA Certification

**TYR-BKBLB-TXP3A**

Meets NIJ 0101.06 Level II Certification

**TYR-BKBLB-NFA2/10**

Meets NIJ 0101.06 Level IIIA Certification


**TYR-BKBLB-NFA3/10**



# TYR TACTICAL® BELT SIZING




## XFRAME® & LOAD CARRIAGE GUNFIGHTER® BELT SIZING

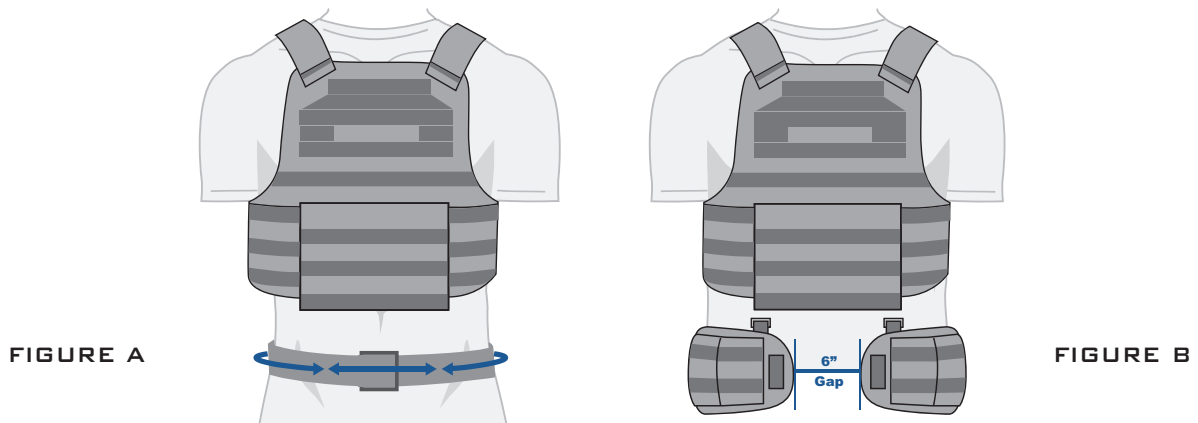

Measure over your clothing from inside one hip bone to inside the other (**FIGURE A**). The ends of the belt should leave a **6" GAP** in the front of your waistline (**FIGURE B**). Once you have that total length, compare it to the chart below for belt sizing. If you desire a closer fit then simply measure leaving only a **3" GAP** to account for the Cobra® Buckle.

TOTAL LENGTHS OF THE BELTS BELOW REFLECT MEASUREMENTS FROM END-TO-END, **NOT PANT SIZES**.



### APPLICABLE BELT SIZES: TYR-GF-MAB/S-001

SMALL 26" - 30"	MEDIUM 29" - 33"	LARGE 32" - 36"	XLARGE 36" - 40"	2XLARGE 39" - 43"
--------------------	---------------------	--------------------	---------------------	----------------------


### APPLICABLE BELT SIZES: TYR-XF-BKBLB & TYR-BKBLB

SMALL 26"	MEDIUM 30"	LARGE 34"	XLARGE 38"	2XLARGE 42"
--------------	---------------	--------------	---------------	----------------


## XFRAME® STAY SIZING

MEASURE FROM THE CENTER OF THE SCAPULA TO THE TOP/CENTER OF GLUTE.

XFrame® Stay Sizes:  
14", 15", 16", 17",  
18", 19", 20", 22"

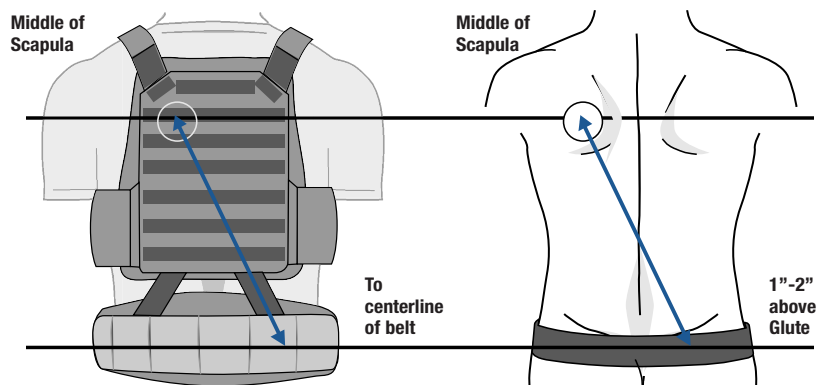

## TYR TACTICAL® SOFT ARMOR SPECIFICATIONS

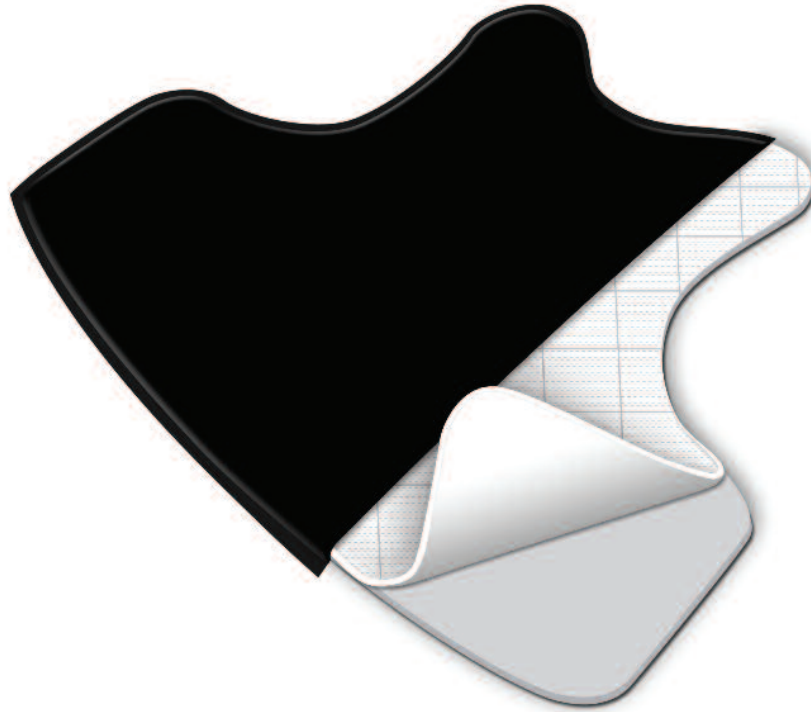

SOFT ARMOR PACKAGES	NFA2/DK	X418	NFA2/10*	NFA3/10*	TXP3A
THICKNESS	.18"	.23"	.21"	.24"	.21"
WEIGHT/ AREAL DENSITY	.72 lbs psf	.78 lbs psf	.82 lbs psf	1.09 lbs psf	1.23 lbs psf
TESTING STANDARD	NIJ 0101.06 USSOCOM	NIJ 0101.06 USMC Testing Standards	NIJ 0101.06 FBI Testing Standards	NIJ 0101.06 FBI Testing Standards	NIJ 0101.06
PROTECTION LEVEL	Level II USSOCOM Fragmentation Requirements	Level II USMC Testing Requirements	Certified Level II FBI & DEA Requirements USSOCOM Fragmentation Requirements	Certified Level IIIA FBI & DEA Requirements	Certified Level IIIA
V <sup>50</sup>	9mm / 1999 fps	9mm / 1999 fps .357 Mag / 1852	9mm / 1686 fps .357 Mag / 1741 fps	.357 Sig / 1865 fps .44 Mag / 1690 fps	.357 Sig / 1923 fps .44 Mag / 1647 fps
BACK-FACE DEFORMATION	9mm / 37.8mm .357 Mag / 38.7mm	9mm / 33.7mm .357 Mag / 40.5mm	9mm / 33.8mm .357 Mag / 36.6mm	.357 Sig / 30.3mm .44 Mag / 35.4mm	.357 Sig / 28.3mm .44 Mag / 34.5mm
IDEAL USE	Tactical/ Military	Tactical/ Military	Concealable/ Tactical	Tactical	Tactical

\*Available in Gender Neutral and Female Version